


Product Code

4411/7A

Solid Core Drier Shell
7/8"-22mm ODS

CLASSIC

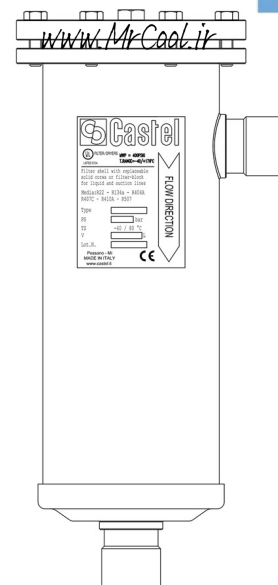

Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges. Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

- HCFC (R22)
- HFC (R134a, R404A, R407C, R410A, or R507)
- HFO and HFO/HFC blends (R1234ze, R448A, R449A, R450A, R452A, R513A)

Maximum allowable pressure PS = 45 bar.

Allowable temperatures TS = -40 / +80 °C

Product details

Connections ODS Ø [in.] 7/8"

Connections ODS Ø [mm] 22

Cores type 4490/A4490/B4490/AA4490/AB

N° of cores 1

Nominal volume [cm³] 800

PS[bar] 45 (1)

TS[°C] Min -40

TS[°C] Max +80

Package pcs 1

Info Threaded cover

Notes

(1): MWP = 470 psi according to UL approval