



# CO<sub>2</sub> SAVER.


Quick Reference Guide



The market leading brand of thermoplastic hose and fittings designed specifically for Air Conditioning and Refrigeration systems. The preferred flexible choice for all pressure switch, manometer and oil line connections.



The **QUADRA DN2** flexible hose represents the most efficient solution for the connection of pressure gauges, pressure switches and pressure test points. The **QUADRA DN2** hoses have an internal diameter of 2 mm and therefore they can substitute capillary rigid copper tubing

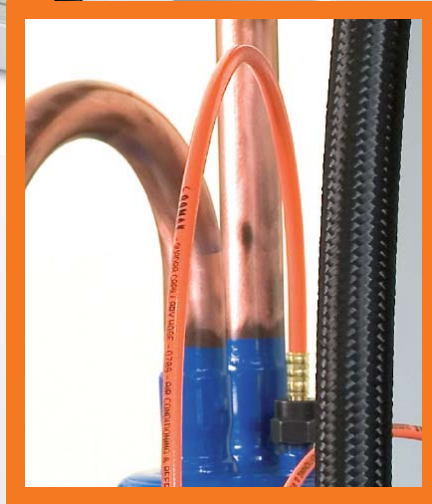

The **QUADRA DN4** flexible hose is the ideal solution for equalizing and oil return lines. The **QUADRA DN4** hoses have an internal diameter of 4 mm and therefore they can substitute rigid copper tubing of OD 6 mm or 1/4".



The **QUADRA DN6** flexible hose is the perfect solution for the oil return lines and for the oil equalization systems. The **QUADRA DN6** hoses are characterized by an internal diameter of 6 mm, and therefore they can substitute rigid copper tubing of OD 8 mm or 5/16".

# APPLICATIONS

**CO<sub>2</sub> SAVER.**






**How much CO<sub>2</sub> equivalent, through emissions of HFCs, have you introduced in our environment so far?**





We are all requested to decrease CO<sub>2</sub> equivalent emissions of HFCs in order to control the global warming of our planet.

The new **QUADRA** flexible hose is a “**CO<sub>2</sub> EQUIVALENT**” **SAVER**, due to its very low permeability to the majority of the refrigerant gasses exceeding EN 1736 CLASS 1, and due to its capacity to reduce system vibrations as well as its simplicity to be installed.

Due to its **FLEXIBILITY** the introduction of the **QUADRA** product range assures the following advantages:

-  **SPEED UP** the assembly procedure
-  **ABSORB** the **VIBRATION** of the compressor
-  **REDUCE** the **NOISE**


The **QUADRA** system is composed of hoses, fittings and the assembly tools. The entire **QUADRA** system is conceived to work in all refrigeration and air conditioning applications and can guarantee the following key features:

-  **Exceeds EN 1736 CLASS 1**
-  **CO<sub>2</sub> compatibility with working pressure up to 120 bar**
-  **UV resistant**
-  **RoHS compliance**



# BENEFITS

# PERFORMANCE and conditions of use DN2-DN4-DN6

part number	Pack	DN	OD mm	WP			BP			WT		BEND RADIUS mm	CRIMPING DIAMETER Ø mm	CRIMPING DIAMETER Ø mm	CRIMPING DIAMETER Ø mm
				bar	MPa	psi	bar	MPa	psi	min°C	max°C				
<b>0780C</b> <b>0780BC</b>	 50 m	DN2	6,1	120	12,0	1740	600	60	8700	-45°	+130°	10	7 ±0,1	NA	7 ±0,15
<b>0780K</b> <b>0780BK</b>	 10 m														
<b>0789C</b> <b>0789BC</b>	 50 m	DN4	8,3	120	12,0	1740	600	60	8700	-45°	+130°	25	NA	9,8 ±0,1	10 ±0,15
<b>0789K</b> <b>0789BK</b>	 10 m														
<b>0786C</b> <b>0786BC</b>	 50 m	DN6	10,9	120	12,0	1740	600	60	8700	-45°	+130°	35	NA	12,4 ±0,1	12,4 ±0,2
<b>0786K</b> <b>0786BK</b>	 10 m														

## PERMITTED FLUIDS

[www.MrCool.ir](http://www.MrCool.ir)

### Type of Gas

**HFC** (R134a, R404A, R407A, R407B, R407C, R410A, R507)

**HCFC** (R22)

**CO<sub>2</sub>**

### Type of Oil

polyol ester based

mineral oils

polyol ester based



The QUADRA capillaries and fittings can now be used with CO<sub>2</sub> at working pressures of up to 120 bar.

## Classification of QUADRA capillary hoses

according to Directive 97/23/CE - paragraph 3 article 3

### WORKING FEATURES

PS = 120 bar

TS = -45°C / +130°C

### GOMAX MODEL:

QUADRA DN 2  
QUADRA DN 4  
QUADRA DN 6

Permeability classification according to the European Standard EN 1736:2008 for non metallic tubes used in air conditioning and refrigeration systems

low permeability

CLASS 1

CLASS 2

CLASS 3

high permeability

	TEST DATA	Test temperature		
		+32 °C	+100 °C	
R404A	Test pressure	14.0	60.0	bar
	QUADRA™ DN2 permeability rate	0.12	8.20	g/m <sup>2</sup> /year
	QUADRA™ DN4 permeability rate	0.19	9.10	g/m <sup>2</sup> /year
	QUADRA™ DN6 permeability rate	0.13	6.50	g/m <sup>2</sup> /year
R407C	Test pressure	13.3	60.0	bar
	QUADRA™ DN2 permeability rate	0.11	7.63	g/m <sup>2</sup> /year
	QUADRA™ DN4 permeability rate	0.17	8.46	g/m <sup>2</sup> /year
	QUADRA™ DN6 permeability rate	0.11	6.05	g/m <sup>2</sup> /year
R410A	Test pressure	18.8	60.0	bar
	QUADRA™ DN2 permeability rate	0.14	7.13	g/m <sup>2</sup> /year
	QUADRA™ DN4 permeability rate	0.22	7.92	g/m <sup>2</sup> /year
	QUADRA™ DN6 permeability rate	0.15	5.66	g/m <sup>2</sup> /year
R134a	Test pressure	7.1	60.0	bar
	QUADRA™ DN2 permeability rate	0.06	8.45	g/m <sup>2</sup> /year
	QUADRA™ DN4 permeability rate	0.10	9.37	g/m <sup>2</sup> /year
	QUADRA™ DN6 permeability rate	0.07	6.69	g/m <sup>2</sup> /year

Figures indicated are average of all the highest obtained values converted from Helium to refrigerant leak rate, as specified within EN 1736:2008.

Test report: BO-TI S- 219890 -TUV- 01- 03- 12 issued by TÜV Italia


The test method and procedures have been verified by TÜV Italia as third party.

As a result of the assessment and inspection of the characteristics and performance of the permeability test machine, of the test procedures utilized, carried out at the premises of Transfer Oil S.p.A. -Italy, TÜV Italia confirms that it meets the requirements of EN 1736:2008

# QUADRA DN2 fittings

<b>1/4 SAE Straight Female Fitting</b>  <b>XBA02C</b> <b>WBA02C</b> <b>KBA02C</b> 50 pcs  50 pcs  10 pcs 	<b>1/4 Straight Female Fitting + Valve Opener</b>  <b>XBB02C</b> <b>WBB02C</b> <b>KBB02C</b> 50 pcs  50 pcs  10 pcs 	<b>1/4 Female Elbow 90° Fitting</b>  <b>XCA02C</b> <b>WCA02C</b> <b>KCA02C</b> 50 pcs  50 pcs  10 pcs 	<b>Elbow Fitting 90°</b>  <b>WPD2C1</b> <b>KPD2C1</b> 50 pcs  10 pcs 
<b>"T" Fitting</b>  <b>WPB0C1</b> <b>KPB0C1</b> 50 pcs  10 pcs 	<b>"T" Fitting With One Female 1/4 SAE</b>  <b>XPB0C2</b> <b>WPB0C2</b> <b>KPB0C2</b> 50 pcs  50 pcs  10 pcs 	<b>"T" Fitting With One Female 1/4 SAE</b>  <b>XPB2C4</b> <b>WPB2C4</b> <b>KPB2C4</b> 50 pcs  50 pcs  10 pcs 	<b>"T" Fitting With Females 1/4 SAE At 90°</b>  <b>XPB2C7</b> <b>WPB2C7</b> <b>KPB2C7</b> 50 pcs  50 pcs  10 pcs 
<b>"T" Fitting With 2 Females 1/4 SAE At 180°</b>  <b>XPB2C3</b> <b>WPB2C3</b> <b>KPB2C3</b> 50 pcs  50 pcs  10 pcs 	<b>Cross Fitting</b>  <b>WPA2C1</b> <b>KPA2C1</b> 50 pcs  10 pcs 	<b>Cross Fitting With 1 Female 1/4 SAE</b>  <b>XPA2C2</b> <b>WPA2C2</b> <b>KPA2C2</b> 50 pcs  50 pcs  10 pcs 	<b>Cross Fitting With 2 Females 1/4 SAE At 180°</b>  <b>XPA2C3</b> <b>WPA2C3</b> <b>KPA2C3</b> 50 pcs  50 pcs  10 pcs 
<b>Cross Fitting With 2 Females 1/4 SAE At 90°</b>  <b>XPA2C4</b> <b>WPA2C4</b> <b>KPA2C4</b> 50 pcs  50 pcs  10 pcs 	<b>Cross Fitting With 3 Females 1/4 SAE</b>  <b>XPA2C5</b> <b>WPA2C5</b> <b>KPA2C5</b> 50 pcs  50 pcs  10 pcs 	<b>1/4 SAE Straight Male</b>  <b>WDN22C</b> <b>KDN22C</b> 50 pcs  10 pcs 	<b>Copper Brazing Fitting (4 X 6 X 100 mm)</b>  <b>WZE2C1</b> 50 pcs 

## THE QUADRA SYSTEM - Assembling instructions

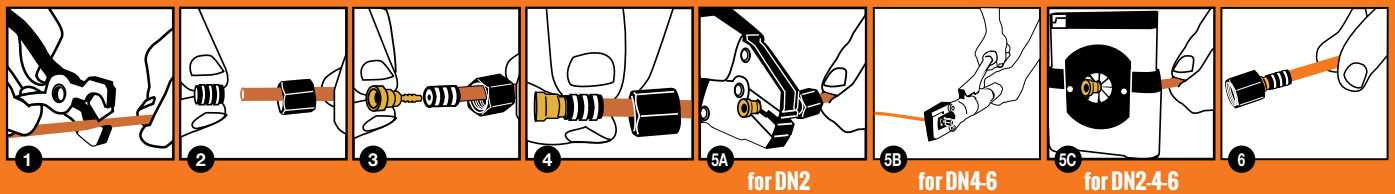

1 Cut the QUADRA capillary hose to the required length using the special WXA004 cutter

2 Slip the nut over the hose (depending on fitting type). Ensure that the threaded side is pointing towards the end of the hose that needs assembling.

3 When pushing the ferrule over the hose end, ensure its correct positioning, in line with the hose end. Push the insert into the hose end you want to assemble.

4 Pay attention not to move the components already fitted and slide the ferrule over the hose towards the insert positioning it in line with the insert.

5A Crimp the ferrule with our hand pliers type RXA007, up to the limit stop of the pliers: once the optimal deformation has been achieved the pliers will open automatically

5B Crimp the ferrule using our pliers cod. RXA005: open the punches using the special lever, then put the ferrule properly between the pinches. The deformation is achieved when the pliers release and the lever idles.

5C Crimp the ferrule with our crimper RXA006-RXA008. Keep the lever pulled. Once the optimal deformation has been achieved the crimper will stop automatically.

6 The assembling is finished and the eventual nut can easily slide over the ferrule: check the correct positioning of the components and make sure the entire surface of the ferrule has been swaged.

### Note:

Once the hose assembly is connected to the machine, do not move or rotate it, otherwise you risk loosening the nut or damaging the fitting by compromising its tightness. In case you have to modify the orientation of the coupling, unscrew the nut, position the hose assembly, then tighten the nut again respecting the torque value of min 20 N·m, max 25 N·m.

# QUADRA DN4 fittings

# QUADRA DN6 fittings

1/4 SAE Straight Female Fitting			1/4 Straight Female Fitting + Valve Opener		
		x1			x1
<b>XBA02M</b>	<b>WBA02M</b>	<b>KBA02M</b>	<b>XBB22M</b>	<b>WBB22M</b>	<b>KBB22M</b>
50 pcs	50 pcs	10 pcs	50 pcs	50 pcs	10 pcs

1/4 SAE Straight Female Fitting			3/8 SAE Straight Female Fitting		
		x1			x1
<b>XBA02N</b>	<b>WBA02N</b>	<b>KBA02N</b>	<b>XBA04N</b>	<b>WBA04N</b>	<b>KBA04N</b>
50 pcs	50 pcs	10 pcs	50 pcs	50 pcs	10 pcs

3/8 SAE Straight Female Fitting			1/4 SAE Elbow Female 90°		
		x1			x1
<b>XBA04M</b>	<b>WBA04M</b>	<b>KBA04M</b>	<b>XCA02M</b>	<b>WCA02M</b>	<b>KCA02M</b>
50 pcs	50 pcs	10 pcs	50 pcs	50 pcs	10 pcs

1/4 SAE Elbow Female 90°			3/8 SAE Elbow Female 90°		
		x1			x1
<b>XCA02N</b>	<b>WCA02N</b>	<b>KCA02N</b>	<b>XCA04N</b>	<b>WCA04N</b>	<b>KCA04N</b>
50 pcs	50 pcs	10 pcs	50 pcs	50 pcs	10 pcs

3/8 SAE Elbow Female 90°			"T" Fitting		
		x1			x3
<b>XCA04M</b>	<b>WCA04M</b>	<b>KCA04M</b>	<b>WPB0M1</b>	<b>KPB0M1</b>	
50 pcs	50 pcs	10 pcs	50 pcs	10 pcs	


Copper Brazing Fitting (6 X 8 X 100 mm)		
		x1
	<b>WZE2N1</b>	
	50 pcs	

"T" Fitting With One Female 1/4 SAE			"T" Fitting With One Female 1/4 SAE		
		x2			x2
<b>XPB2M4</b>	<b>WPB2M4</b>	<b>KPB2M4</b>	<b>XPB2M2</b>	<b>WPB2M2</b>	<b>KPB2M2</b>
50 pcs	50 pcs	10 pcs	50 pcs	50 pcs	10 pcs

1/4 SAE Straight Male Fitting			Copper Brazing Fitting (4 X 6 X 100 mm)		
		x1			x1
	<b>WDN22M</b>	<b>KDN22M</b>		<b>WZE2M1</b>	
	50 pcs	10 pcs		50 pcs	

## Custom made hose assembly

Possibility of supplying laid out capillary circuits to customer specification.

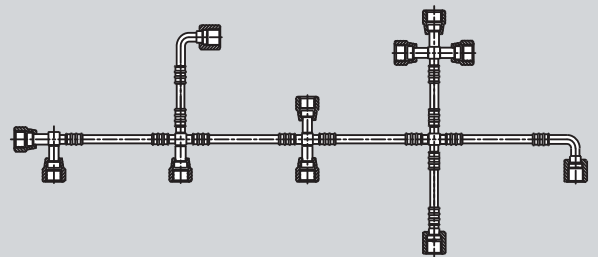

## Packaging Features

### HOSES

- 50m QUADRA hose **LOOSE** in 50m roll
- 10m QUADRA hose **PACKAGED IN BAGS** in 10m roll

### FITTINGS

- 50 pcs QUADRA fittings **PACKAGED IN BOXES** 50 pieces
- 10 pcs QUADRA fittings **PACKAGED IN BLISTER PACKS** 10 pieces

### ASSEMBLED HOSES

- 50 pcs QUADRA assembled hoses **PACKAGED IN BAGS** of 50 pcs

## QUADRA fittings key Features



## CUTTER AND BLADES FOR DN2-DN4-DN6 HOSES

Cutter



Cutter blades



Part number

**WXA004**

**WXB004**

Pack



1 pcs



2 pcs

## HAND PLIERS FOR DN2 HOSES



Part number

**RXA007**

Pack



1 pcs

## QUADRA-CRIMP FOR DN2-DN4-DN6 HOSES



Part number

**RXA006**  
**RXA008**

Pack



1 pcs

[www.MrCool.ir](http://www.MrCool.ir)

## HYDRAULIC PLIERS FOR DN4 - DN6 HOSES



Part number

**RXA005**

Pack



1 pcs

## VALVE OPENER, GASKET AND NUTCAPS

Removable valve opener



Copper gasket 1/4



Copper gasket 3/8



QUADRA 1/4 fitting plugs



QUADRA 3/8 fitting plugs



Part number

**WTD2Z1**

**WRP502**

**WRP504**

**WRW912**

**WRW914**

Pack



50 pcs



50 pcs



50 pcs





50 pcs



50 pcs

## QUADRA - CLAMPS



Part number

**RXB007**

Pack



1 pcs

## QUADRA CASE

- 10 m. ref. 0780K
- 10 m. ref. 0780BK
- 20 ref. WBA02C
- 20 ref. WBB02C
- 10 ref. WCA02C
- 10 ref. WPB0C1
- 10 ref. WPB0C2
- 50 ref. WRP502
- 50 ref. WTD2Z1
- 1 ref. RXA007
- 1 ref. WXA004
- 1 ref. WXB004



Part number

**MR043**

**W00001**

Pack



1 pcs



1 pcs

**Transfer Oil S.p.A., with more than 30 years of experience, are today one of the major independent manufacturers of Thermoplastic and PTFE hose, catering for numerous applications within the medium, high and very high pressure Hydraulic and Industrial markets.**



Since its founding all products manufactured by Transfer Oil are designed, developed and produced in State of the art Production facilities Headquartered in Colorno, Italy, With a total capacity of more than 13 million meters (42 million feet) per year. *www.MrCool.ir*

Long standing cooperation with the Industries most prominent Global suppliers ensure a responsive network of Distribution Partners extending through over 65 countries across the globe. Providing quick availability and technical support for whatever the demands may be.

The GOMAX® business division of the company is committed to the manufacturing and marketing of thermoplastic hose and fitting solutions for air conditioning and refrigeration industry. GOMAX products are composed by three main product ranges (ZERO | INFINITY | QUADRA) that are used for suction and discharge lines as well as for pressure switches, manometers and oil lines connection thanks to the world recognized QUADRA Capillary hose system.

Hoses made by Transfer Oil are made to the highest internal standards which have been accredited by ISO 9001:2008 TÜV certification.

Engineered integrity is maintained throughout the manufacturing process that ensures that the critical dimensions can be continuously controlled and maintained throughout the production cycle.

All hoses conform and perform, where applicable, to the relevant RoHS - WEEE - REACH - ISO - CE - EN standards.



### THE QUALITY SYSTEM

Transfer Oil - one of the first companies in the industry to obtain the ISO 9001 certification in 1993 - has developed its own quality system to guarantee customer's satisfaction by using computerized control production systems to which all processes of both production facilities are connected.

**distributed by:**

**NLDI13**

